


SHEET 1 Pitches - Slopes - Overcharges

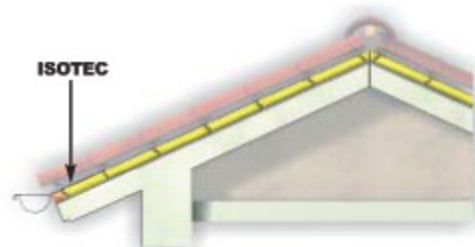

PERMISSIBLE SLOPES

α°	%	Installation of Isotec Coverage
		Tiles carefully secured
45	100	Normal installation with discontinuous coverage
17	30	Installation with continuous coverage

(daN/m ²)								
Interbeam Support (l) cm		60	70	80	90	100	110	120
T h i c k n e s s	60 mm	561	482	415	350	293	251	215
	80 mm	644	550	470	402	351	313	290
	100 mm	753	663	583	512	450	397	348
	120 mm	866	763	670	588	517	457	407
Safety Coefficient 3		corr. to $\frac{1}{3}$ of collapse						
Deflection		Admissible charges respect limit condition $f \leq 1/200 \cdot l$						

Tested by I.T.C. n°3675/RP/03 - 05/11/2003

RANGE

